




Premium
SBR®

Stainless Steel Chain

SY CHAIN

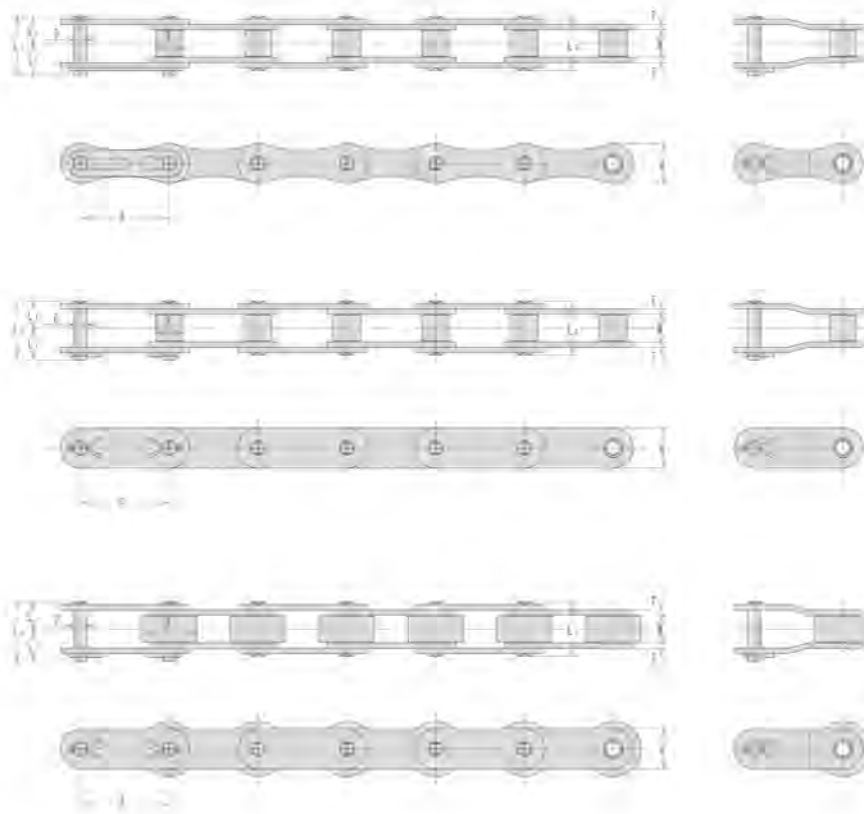

DOUBLE PITCH STAINLESS STEEL CHAIN

SY Chain No.	Dimensions - mm										Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Pin				Plate					
		Width	Dia.	Dia.	Length				Height	Thick.			
		P	W	R	D	LR	Lc	L1	L2	H			
A2040-SS	25.40	7.95	7.92	3.96	16.9	18.5	8.5	10.0	11.4	1.5	12.4	0.44	0.43
A2050-SS	31.75	9.53	10.16	5.08	20.8	22.3	10.4	11.9	15.0	2.0	20.3	0.68	0.73
A2060-SS	38.10	12.70	11.91	5.95	26.0	27.9	13.0	14.9	17.0	2.4	27.4	1.03	1.03
A2080-SS	50.80	15.88	15.88	7.93	32.8	35.5	16.4	19.1	22.6	3.2	47.1	1.77	1.71
C2040-SS	25.40	7.95	7.92	3.96	16.9	18.5	8.5	10.0	11.4	1.5	12.4	0.44	0.48
C2050-SS	31.75	9.53	10.16	5.08	20.8	22.3	10.4	11.9	15.0	2.0	20.3	0.68	0.82
C2060H-SS	38.10	12.70	11.91	5.95	28.8	30.9	14.4	16.5	17.0	3.2	27.4	1.03	1.38
C2080H-SS	50.80	15.88	15.88	7.93	35.7	38.8	17.9	20.9	22.6	4.0	47.1	1.77	2.32
※C2100H-SS	63.50	19.05	19.05	9.53	42.4	46.0	21.2	24.8	28.6	4.8	56.9	2.55	3.46
※C2120H-SS	76.20	25.40	22.23	11.10	52.8	57.2	26.4	30.8	34.9	5.6	76.5	3.92	4.92
※C2160H-SS	101.60	31.75	28.58	14.28	67.9	73.1	34.0	39.1	47.6	7.2	123	6.37	8.02
C2042-SS	25.40	7.95	15.88	3.96	16.9	18.5	8.5	10.0	11.4	1.5	12.4	0.44	0.82
C2052-SS	31.75	9.53	19.05	5.08	20.8	22.3	10.4	11.9	15.0	2.0	20.3	0.68	1.26
C2062H-SS	38.10	12.70	22.23	5.95	28.8	30.9	14.4	16.5	17.0	3.2	27.4	1.03	2.08
C2082H-SS	50.80	15.88	28.58	7.93	35.7	38.8	17.9	20.9	22.6	4.0	47.1	1.77	3.36
※C2102H-SS	63.50	19.05	39.67	9.53	42.4	46.0	21.2	24.8	28.6	4.8	56.9	2.55	5.64
※C2122H-SS	76.20	25.40	44.45	11.10	52.8	57.2	26.4	30.8	34.9	5.6	76.5	3.92	7.87
※C2162H-SS	101.60	31.75	57.15	14.28	67.9	73.1	34.0	39.1	47.6	7.2	123	6.37	12.77

※304 Stainless steel