


Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max			
	mm	mm	mm	mm	mm	mm	mm	mm			
40-1	12.70	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10/3205	17.5	0.62
50-1	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20/5045	29.4	1.02
60-1	19.05	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80/7227	41.5	1.50
80-1	25.40	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70/12886	69.4	2.60
08B-1	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.00	19.40	0.69
10B-1	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.40	27.50	0.93
12B-1	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	29.00	32.20	1.15
16B-1	25.400	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	60.00	72.80	2.71

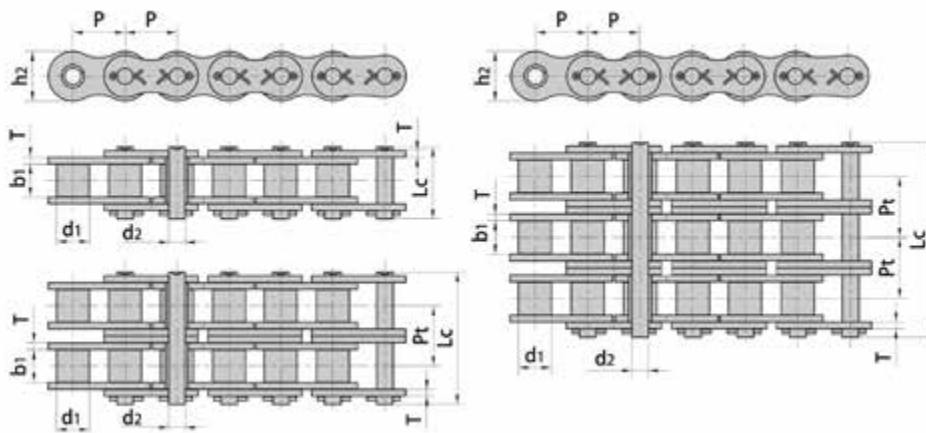

Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	p	d1 max	b1 min	d2 max	L max	h2 max	T max			
	mm	mm	mm	mm	mm	mm	mm			
50H	15.875	10.16	9.40	5.08	24.4	15.09	2.42	22.2/5045	30.2	1.25
60H	19.05	11.91	12.57	5.94	31.6	18.00	3.25	31.8/7227	42.7	1.87
80H	25.40	15.88	15.75	7.92	39.4	24.00	4.00	56.7/12886	71.4	3.10