


## BL Series

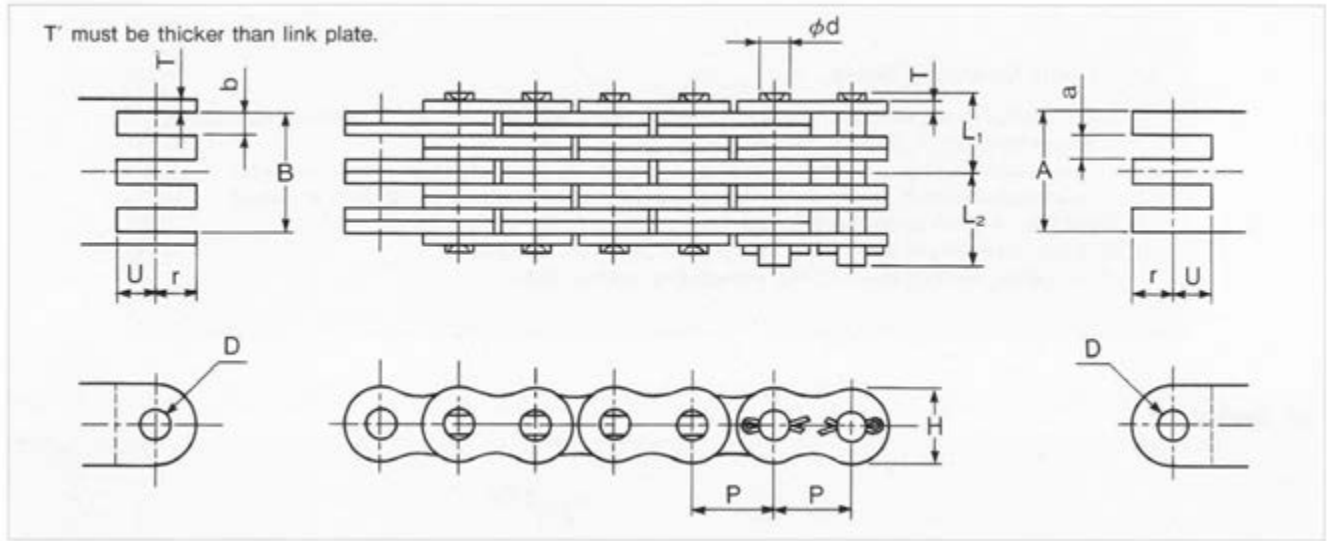

KCM Chain No.	Pitch P	Plate			Pin		Min.Tensile Strength Kn(kgf)	1-m chain weight (kg)	End Connector							
		Lacing	Thick-ness T	Height H	Outside diameter d	Caulked L1			Pinned L2	D Min.	r Max.	U Min.	A Max.	a Min.	B Min.	b Min.
BL434	12.7	3x4	2.00	11.7	5.09	8.27	10.23	35.30(3,600)	1.02	5.12	6.35	6.35	10.41	2.29	10.67	4.32
BL466		6x6				13.40	15.35	70.60(7,200)	1.72				21.00	4.41	21.35	4.41
BL523	15.875	2x3	2.4	14.6	5.96	7.42	10.13	39.20(4,000)	1.13	5.98	7.92	7.92	7.13	-	-	7.76
BL532		3 x 2				-	-	-	-				-	-		
BL534		3x4				9.92	12.60	58.80(6,000)	1.56				12.18	2.62	12.48	5.05
BL546*		4x6				13.62	16.33	78.50(8,000)	2.22				19.52	5.26	20.03	7.64
BL566		6x6				16.10	18.80	117.70(12,000)	2.66				24.57	5.16	24.98	5.16
BL623		2x3				9.55	12.65	63.70(6,500)	1.82				9.67	-	-	10.31
BL634	19.05	3x4	3.2	17.5	7.94	12.80	15.90	95.60(9,750)	2.52	7.96	9.53	9.53	16.50	3.60	16.88	6.83
BL644		4x4				14.42	17.53	127.50(13,000)	2.87				19.85	6.95	20.35	6.95
BL646		4x6				17.67	20.78	127.50(13,000)	3.57				26.43	7.09	27.07	10.31
BL823		2x3				12.45	15.40	103.00(10,500)	2.97				11.97	-	-	12.73
BL834	3x4	16.55	19.50	103.00(10,500)	4.11	20.40	4.44	20.85	8.43							
BL844	25.4	4x4	4	23	9.54	18.60	21.55	154.90(15,800)	4.68	9.56	12.7	12.7	24.54	8.58	25.14	8.59
BL846		4x6				22.70	25.65	205.90(21,000)	5.82				32.68	8.74	33.44	12.73
BL866		6x6				26.80	29.75	308.50(31,500)	6.56				41.10	8.58	41.70	8.58
BL1034		3x4				19.65	23.05	215.70(22,000)	6.17				24.40	5.30	24.93	10.08
BL1046	31.75	4x6	4.8	28.9	11.11	27.00	30.40	282.40(28,800)	8.78	11.14	15.88	15.88	39.07	10.43	25.11	15.20
BL1066		6x6				31.90	35.30	423.60(43,200)	10.52				49.15	10.25"	39.96	10.25
BL1234	38.1	3x4	5.6	35	12.71	23.00	27.00	299.10(30,500)	8.71	12.74	19.05	19.05	28.35	6.22	29.30	11.87
BL1246		4x6				31.62	35.63	372.70(38,000)	12.37				45.96	12.26	46.98	17.87

\* Stocked in 100ft reels.

Dimensions (Millimeters)