

SS series stainless steel roller chains provide excellent corrosion protection against low or high temperature, acid, alkali, moisture, scale, oil and magnetism.

SS series stainless steel roller chains are manufactured in accordance with the dimensions ANSI standards.

INTRODUCTION OF SY NEW HIGH POWER NEW SSS SERIES PRODUCTS

SSS series stainless steel roller chains with solid rollers.


Anti-magnetic of solid roller has superior permeability than the common curled roller.

High Power New SSS Chain use a specially treated pin and roller.

Extremely long life is engaged by this surface treatment.

SSS series chain life is more than 2 times longer than that of normal SS series Chain.

50% Higher Allowable Loads

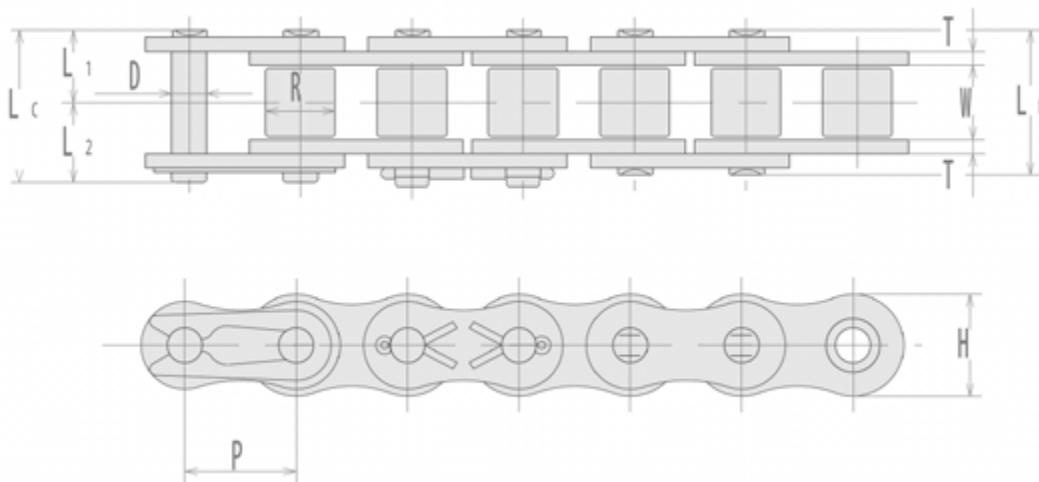

BS AND ANSI STAINLESS STEEL CHAIN

SY Chain No. (BS)	Dimensions - mm										Minimum Ultimate Strength	Maximum Al- lowable Load	A verage Chain Weight
	Pitch	Roller		Pin				Plate					
		Width	Dia.	Dia	Length			Height	Thick.				
		P	W	R	D	LR	LC	L1	L2	H			
06B-SS	9.525	5.72	6.35	3.28	12.6	13.4	6.3	7.1	8.2	1.0/1.25	6.18	0.27	0.43
08B-SS	12.7	7.75	8.51	4.45	16.7	18	8.4	9.6	11.8	1.5	10.3	0.52	0.61
10B-SS	15.875	9.65	10.16	5.08	19	20.7	9.5	11.2	14.7	1.65	15.7	0.68	0.89
12B-SS	19.05	11.68	12.07	5.72	22	23.6	11	12.6	16.1	1.8	18.1	0.88	1.14
16B-SS	25.4	17.02	15.88	8.26	35.1	38.2	17.6	20.6	20.3	3.2/4.0	42.2	2.06	2.59
ANSI	P	W	R	D	LR	LC	L1	L2	H	T1 / T2	kN	Kn	kg/m
35-SS	9.525	4.78	5.08	3.58	12.2	13.7	6.1	7.6	9.0	1.25	5.68	0.26	0.34
40-SS	12.70	7.95	7.92	3.96	16.9	18.5	8.5	10	11.7	1.5	11.1	0.44	0.60
50-SS	15.875	9.53	10.16	5.08	20.8	22.3	10.4	11.9	14.6	2.0	17.6	0.68	0.98
60-SS	19.05	12.7	11.91	5.95	26	27.9	13	14.9	17.5	2.4	24.5	1.03	1.46
80-SS	25.40	15.88	15.88	7.93	32.8	35.5	16.4	19.1	23.4	3.2	42.3	1.77	2.52