


Double-pitch Chains

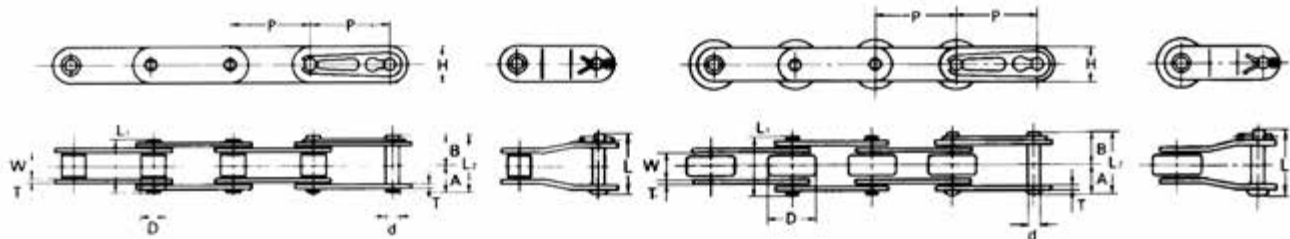

KCM Chain No.	Pitch P	Width between Inner Plates W	Roller Dia. D	PIN						Link Plate		Max. Allowable Load kN (kgf)	Approx. Weight (kg/m)	Links of Dia. 1 unit
				Diameter d	A	B	(A+A) L1	(A+B) L1	Offset L	Thick-ness T	Height H			
C2040 SS	25.40	7.95	7.92	3.97	8.07	10.28	16.15	18.35	19.05	1.5	11.7	45(0.44)	0.49	120
C2042 SS			15.88										0.83	
C2050 SS	31.75	9.53	10.16	5.09	10.17	12.13	20.35	22.30	23.05	2.0	14.6	70(0.69)	0.83	96
C2052 SS			19.05										1.28	
C2060H SS	38.10	12.70	11.91	5.96	14.35	17.05	28.76	31.40	32.85	3.2	17.5	105(1.03)	1.46	80
C2062H SS			22.23										2.14	
C2080H SS	50.8	15.88	15.88	7.94	17.80	20.90	35.60	38.70	40.40	4.0	23.0	180(1.77)	2.44	60
C2082H SS			28.58										3.50	

Dimensions (Millimeters)