





2RU



ZZ




2RS

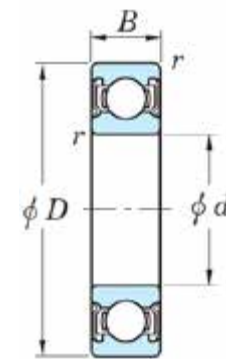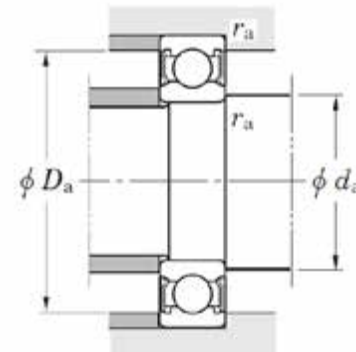


2RU



ZZ





2RS

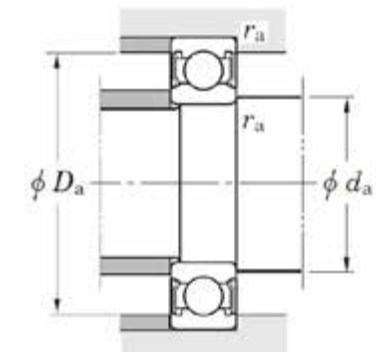


Boundary dimensions(mm)				Basic load ratings(kN)		Fatigue load limit(kN)	Factor	Limiting speeds(min-1)			Bearing No.	Mounting dimensions				Mass Open type (kg)				
d	D	B	r min.	Cr	Cor	Cu	fo	Grease lub.				Shielded*	Non-contact sealed	Extremely light contact sealed*	Contact sealed*		da		Da	ra
								(Z, ZZ RU, 2RU)	(RD, 2RD)	(RS, 2RS)							Bearing Ref.	min.		
10	19	5	0.3	2.15	0.840	0.030	14.8	37000	-	22000	6800	6800 ZZ	6800 2RU	-	6800 2RS	12	12	17	0.3	0.005
12	21	5	0.3	2.40	1.05	0.040	15.3	33000	30000	20000	6801	6801 ZZ	6801 2RU	6801 2RD	6801 2RS	14	14	19	0.3	0.006
15	24	5	0.3	2.60	1.25	0.050	15.8	28000	-	16000	6802	6802 ZZ	6802 2RU	-	6802 2RS	17	17	22	0.3	0.007
17	26	5	0.3	3.30	1.55	0.060	15.7	26000	-	14000	6803	6803 ZZ	6803 2RU	-	6803 2RS	19	19	24	0.3	0.008
20	32	7	0.3	5.00	2.45	0.100	15.5	21000	-	12000	6804	6804 ZZ	6804 2RU	-	6804 2RS	22	22.5	30	0.3	0.018
25	37	7	0.3	5.40	2.95	0.120	16.0	18000	-	10000	6805	6805 ZZ	6805 2RU	-	6805 2RS	27	27.5	35	0.3	0.022
30	42	7	0.3	5.65	3.40	0.140	16.4	15000	-	8600	6806	6806 ZZ	6806 2RU	-	6806 2RS	32	32.5	40	0.3	0.026
35	47	7	0.3	5.95	3.85	0.160	16.5	13000	-	7400	6807	6807 ZZ	6807 2RU	-	6807 2RS	37	37.5	45	0.3	0.030
40	52	7	0.3	6.15	4.20	0.180	16.3	12000	11000	6700	6808	6808 ZZ	6808 2RU	6808 2RD	6808 2RS	42	42	50	0.3	0.033
45	58	7	0.3	7.75	5.4	0.23	16.3	11000	9900	5900	6809	6809 ZZ	6809 2RU	6809 2RD	6809 2RS	47	47	56	0.3	0.04
50	65	7	0.3	8.2	6.1	0.26	16.1	9600	8600	5200	6810	6810 ZZ	6810 2RU	6810 2RD	6810 2RS	52	53	63	0.3	0.052
55	72	9	0.3	11	8.1	0.42	16.2	8700	7800	-	6811	6811 ZZ	6811 2RU	6811 2RD	6811 2RS	57	58.5	70	0.3	0.083
60	78	10	0.3	14.3	10.6	0.55	16.3	8000	7200	-	6812	6812 ZZ	6812 2RU	6812 2RD	6812 2RS	62	63	76	0.3	0.104
65	85	10	0.6	14.9	11.5	0.59	16.2	7300	6600	-	6813	6813 ZZ	6813 2RU	6813 2RD	6813 2RS	69	69	81	0.6	0.126
70	90	10	0.6	15.1	11.9	0.62	16.1	6800	6100	-	6814	6814 ZZ	6814 2RU	6814 2RD	6814 2RS	74	74	86	0.6	0.134
75	95	10	0.6	15.7	12.9	0.66	16	6400	5800	-	6815	6815 ZZ	6815 2RU	6815 2RD	6815 2RS	79	79	91	0.6	0.142
80	100	10	0.6	15.9	13.3	0.69	16	6100	5500	-	6816	6816 ZZ	6816 2RU	6816 2RD	6816 2RS	84	84	96	0.6	0.15
85	110	13	1	23.4	19	0.98	16.2	5600	5000	-	6817	6817 ZZ	6817 2RU	6817 2RD	6817 2RS	90	90.5	105	1	0.266
90	115	13	1	23.8	19.7	1	16.1	5300	4800	-	6818	6818 ZZ	6818 2RU	6818 2RD	6818 2RS	95	95.5	110	1	0.279
100	125	13	1	24.5	21.2	1.05	16	4800	4300	-	6820	6820 ZZ	6820 2RU	6820 2RD	6820 2RS	105	105.5	120	1	0.309
110	140	16	1	35.1	30.7	1.4	16.1	4300	3900	-	6822	6822 ZZ	6822 2RU	6822 2RD	6822 2RS	115	116.5	135	1	0.606


\* Not a stocked range although available on request.

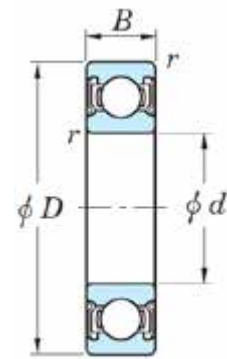




2RU



ZZ



2RS

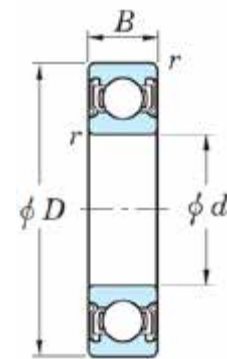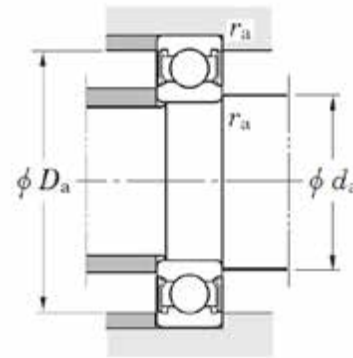


2RU



ZZ



2RS

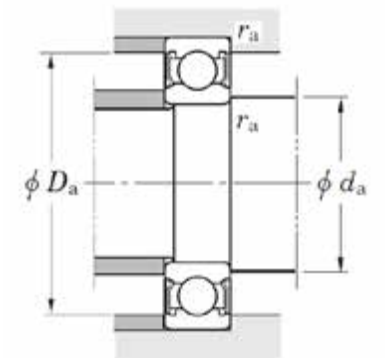

Boundary dimensions(mm)				Basic load ratings(kN)		Fatigue load limit(kN)	Factor	Limiting speeds(min-1)			Bearing Ref.	Bearing No.				Mounting dimensions (mm)				Mass Open type (kg)
d	D	B	r min.	C <sub>r</sub>	C <sub>or</sub>	C <sub>u</sub>	f <sub>o</sub>	Grease lub.				Shielded	Non-contact sealed	Extremely light contact sealed*	Contact sealed	d <sub>a</sub>		D <sub>a</sub>	r <sub>a</sub>	
								(Z, ZZ RU, 2RU)	(RD, 2RD)	(RS, 2RS)						min.	max.			
10	22	6	0.3	3.35	1.25	0.070	14.0	34000	-	21000	6900	6900 ZZ	6900 2RU	-	6900 2RS	12	12.5	20	0.3	0.010
12	24	6	0.3	3.60	1.45	0.080	14.5	31000	28000	18000	6901	6901 ZZ	6901 2RU	6901 2RD	6901 2RS	14	14	22	0.3	0.011
15	28	7	0.3	5.40	2.25	0.120	14.3	26000	23000	15000	6902	6902 ZZ	6902 2RU	6902 2RD	6902 2RS	17	18	26	0.3	0.017
17	30	7	0.3	5.75	2.55	0.130	14.7	23000	21000	13000	6903	6903 ZZ	6903 2RU	6903 2RD	6903 2RS	19	19.5	28	0.3	0.018
20	37	9	0.3	7.95	3.70	0.190	14.7	19000	17000	11000	6904	6904 ZZ	6904 2RU	6904 2RD	6904 2RS	22	23.5	35	0.3	0.036
25	42	9	0.3	8.75	4.55	0.230	15.4	16000	14000	9300	6905	6905 ZZ	6905 2RU	6905 2RD	6905 2RS	27	29	40	0.3	0.041
30	47	9	0.3	9.05	5.00	0.260	15.8	14000	13000	8200	6906	6906 ZZ	6906 2RU	6906 2RD	6906 2RS	32	33	45	0.3	0.045
35	55	10	0.6	13.6	7.75	0.440	15.7	12000	11000	6800	6907	6907 ZZ	6907 2RU	6907 2RD	6907 2RS	39	40	51	0.6	0.073
40	62	12	0.6	17.1	9.95	0.570	15.6	11000	9900	6100	6908	6908 ZZ	6908 2RU	6908 2RD	6908 2RS	44	44.5	58	0.6	0.112
45	68	12	0.6	17.7	10.9	0.600	15.9	9700	8700	5500	6909	6909 ZZ	6909 2RU	6909 2RD	6909 2RS	49	50	64	0.6	0.132
50	72	12	0.6	18.2	11.7	0.640	16.1	9000	-	5000	6910	6910 ZZ	6910 2RU	-	-	54	55.5	68	0.6	0.133
55	80	13	1	20.8	14.1	0.760	16.2	8100	7300	4500	6911	6911 ZZ	6911 2RU	6911 2RD	6911 2RS	60	60.5	75	1	0.185
60	85	13	1	25.2	17.3	0.940	16.2	7500	-	-	6912	6912 ZZ	6912 2RU	-	-	65	66	80	1	0.192
65	90	13	1	21.7	16.1	0.830	16.6	7100	6400	3900	6913	6913 ZZ	6913 2RU	6913 2RD	6913 2RS	70	71	85	1	0.211
70	100	16	1	29.7	21.2	1.1	16.3	6400	5800	3600	6914	6914 ZZ	6914 2RU	6914 2RD	6914 2RS	75	76.5	95	1	0.342
75	105	16	1	30.5	22.6	1.20	16.5	6100	-	-	6915	6915 ZZ	6915 2RU	-	6915 2RS	80	82.5	100	1	0.363
80	110	16	1	31.2	24	1.25	16.6	5700	5100	3200	6916	6916 ZZ	6916 2RU	6916 2RD	6916 2RS	85	86.5	105	1	0.382
85	120	18	1.1	39.9	29.6	1.55	16.4	5300	4800	3000	6917	6917 ZZ	6917 2RU	6917 2RD	6917 2RS	91.5	92.5	113.5	1	0.535
90	125	18	1.1	41	31.6	1.6	16.5	5100	4600	2800	6918	6918 ZZ	6918 2RU	6918 2RD	6918 2RS	96.5	97.5	118.5	1	0.565
100	140	20	1.1	51.5	39.6	1.90	16.2	4500	-	-	6920	6920 ZZ	6920-1 2RU	-	6920-2RS	106.5	110.5	133.5	1	0.960
110	150	20	1.1	59.9	47.8	2.20	16.4	4100	-	-	6922	6922 ZZ	6922 2RU	-	-	116.5	119.5	143.5	1	1.04
120	165	22	1.1	71.6	56.9	2.50	16.4	3800	-	-	6924	6924 ZZ	6924 2RU	-	-	126.5	131.5	158.5	1	1.41

\* Not a stocked range although available on request.