
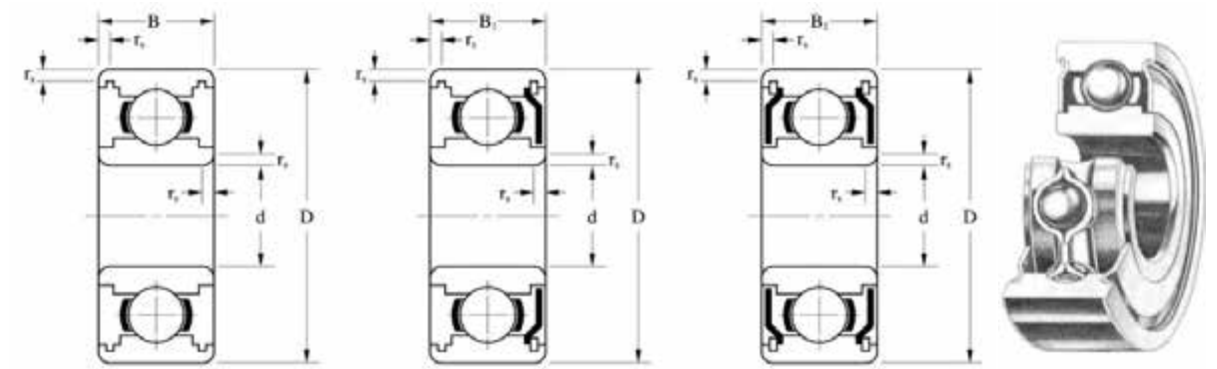


R Series

R Series

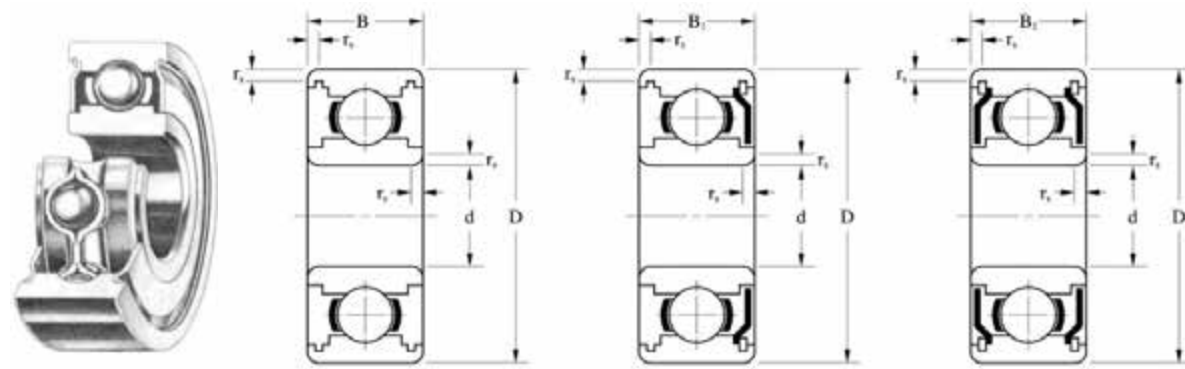

Bore Diameter: d		Outer Diameter: D		Chamfer rs (min)		Open Bearings		Open	Seal, Shield Bearings				Load Rating		Max Speed		Cage Type	Ball Complement			Weight (Reference)
						IR Width: B			Bearing Reference		Width		Cr (N)	Cor (N)	Grease	Oil		Qty.:Z	Size:Dw		
mm	inch	mm	inch	mm	inch	mm	inch		2 Shields	2 Seals	mm	inch	(N)		x1000min <sup>-1</sup>		pcs.	mm	inch	g	
3.175	0.125	9.525	0.375	0.30	0.012	3.967	0.156	R2	R2 ZZ	R2 2RS	3.967	0.156	633	218	66	78	J	7	1.588	0.063	1.39
4.762	0.188	12.700	0.500	0.30	0.012	3.967	0.156	R3	R3 ZZ	R3 2RS	4.978	0.196	1300	485	51	60	J	7	2.381	0.094	2.61
6.350	0.250	15.875	0.625	0.30	0.012	4.978	0.196	R4	R4 ZZ	R4 2RS	4.978	0.196	1480	617	42	50	J	8	2.381	0.094	4.19
6.350	0.250	19.050	0.750	0.40	0.016	5.558	0.219	R4A	R4A ZZ	R4A 2RS	7.142	0.281	2340	889	38	45	J	6	3.500	0.138	8.96
9.525	0.375	22.225	0.875	0.40	0.016	5.558	0.219	R6	R6 ZZ	R6 2RS	7.142	0.281	3330	1410	31	37	J	7	3.969	0.156	10.7
12.700	0.500	28.575	1.125	0.40	0.016	6.350	0.250	R8	R8 ZZ	R8 2RS	7.938	0.313	5110	2390	25	30	J	8	4.762	0.188	20.5
15.875	0.625	34.925	1.375	0.80	0.032	7.142	0.281	R10	R10 ZZ	R10 2RS	8.733	0.344	6000	3270	20	24	RJ	10	4.762	0.188	35.8
19.050	0.750	41.275	1.625	0.80	0.032	7.938	0.313	R12	R12ZZ	R12 2RS	11.113	0.438	7920	4450	17	21	RJ	10	5.556	0.219	69.3
25.4	1.000	50.8	2	-	-	-	-	R16	R16ZZ	R16 2RS	-	-	11976	5813	9	11	-	-	-	-	87