



NAS5000 Series


NAS5000 Series

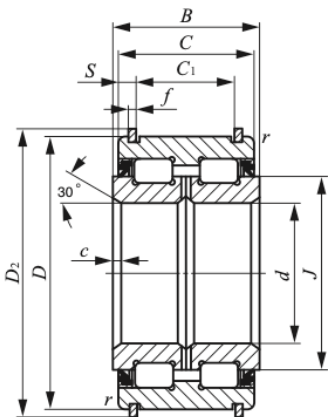


NAS50...UUNR

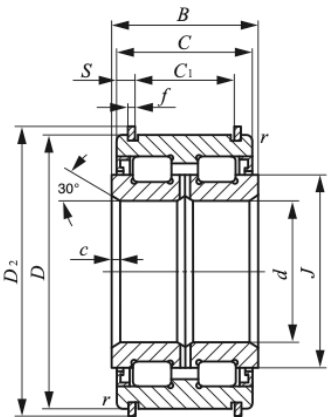

NAS50...ZZNR

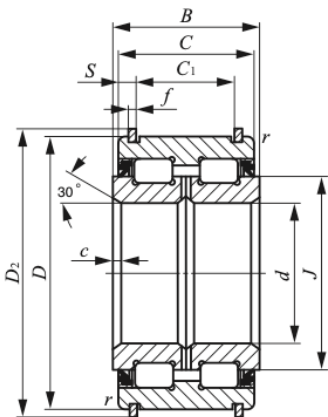

NAS50...UUNR

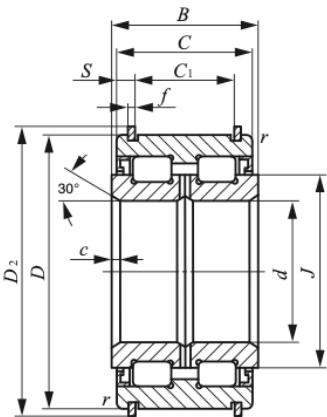

NAS50...ZZNR

Shaft dia. mm	Identification number			Boundary dimensions mm												Basic dynamic load rating C N	Basic static load rating C0 N	Allowable rotational speed(2) rpm
	Sealed type	Shield type*	Mass (Ref.) kg	d	D	D2	B	C	C1	S	f	c	r x min	J				
40	NAS 5008UUNR	NAS 5008ZZNR	0.55	40	68	71.8	38	37	28	4.5	2	1.5	0.6	50		79 500	116 000	2 500
45	NAS 5009UUNR	NAS 5009ZZNR	0.7	45	75	78.8	40	39	30	4.5	2	1.5	0.6	56		95 500	144 000	2 000
50	NAS 5010UUNR	NAS 5010ZZNR	0.75	50	90	83.8	40	39	30	4.5	2	1.5	0.6	61		100 000	158 000	2 000
55	NAS 5011UUNR	NAS 5011ZZNR	1.15	55	90	94.8	46	45	34	5.5	2.5	2	0.6	68		118 000	193 000	1 800
60	NAS 5012UUNR	NAS 5012ZZNR	1.2	60	95	99.8	46	45	34	5.5	2.5	2	0.6	73		123 000	208 000	1 700
65	NAS 5013UUNR	NAS 5013ZZNR	1.3	65	100	104.8	46	45	34	5.5	2.5	2	0.6	78		128 000	224 000	1 600
70	NAS 5014UUNR	NAS 5014ZZNR	1.9	70	110	114.5	54	53	42	5.5	2.5	2	0.6	84		171 000	284 000	1 400
75	NAS 5015UUNR	NAS 5015ZZNR	2	75	115	119.5	54	53	42	5.5	2.5	2	0.6	91		179 000	308 000	1 300
80	NAS 5016UUNR	NAS 5016ZZNR	2.65	80	125	129.5	60	59	48	5.5	2.5	2	0.6	97		251 000	428 000	1 300
85	NAS 5017UUNR	NAS 5017ZZNR	2.8	85	130	134.5	60	59	48	5.5	2.5	2	0.6	101		257 000	446 000	1 200
90	NAS 5018UUNR	NAS 5018ZZNR	3.7	90	140	145.4	67	66	54	6	2.5	2.5	0.6	110		305 000	540 000	1 100
95	NAS 5019UUNR	NAS 5019ZZNR	3.9	95	145	150.4	67	66	54	6	2.5	2.5	0.6	114		312 000	562 000	1 100
100	NAS 5020UUNR	NAS 5020ZZNR	4.05	100	150	155.4	67	66	54	6	2.5	2.5	0.6	118		318 000	584 000	1 100
110	NAS 5022UUNR	NAS 5022ZZNR	6.5	110	170	175.4	80	79	65	7	2.5	3	1	130		384 000	697 000	900
120	NAS 5024UUNR	NAS 5024ZZNR	6.95	120	180	188.4	80	79	65	7	3	3	1	139.5		400 000	750 000	850

*Not a stocked range although available on request