
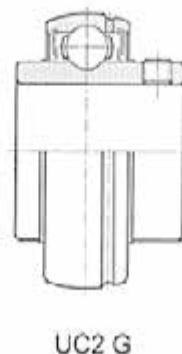


## UC200 Triple Lip Series

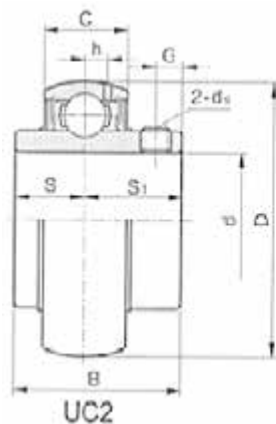

L3 type seal

Part No.	Dimensions(mm / inch)									Basic Loads (KN)		N.W. (kg/lb)
	d (mm)	d (inch)	D	B	C	S	S1	G	h	Cr	Cor	
UC204TRL	20	-	47	31	16	12.7	18.3	5	4	10.8	5.5	0.16
UC204-12TRL	-	3/4	1.85	1.221	0.63	0.5	0.721	0.197	0.158	11	5.7	0.35
UC205TRL	25	-	52	34	17	14.3	19.8	5.5	4.2	11.8	6.6	0.21
UC205-16TRL	-	1	2.047	1.343	0.669	0.563	0.78	0.217	0.165	12	6.7	0.47
UC206TRL	30	-	62	38	19	15.9	22.2	6	4.8	16.3	9.4	0.32
UC206-20TRL	-	1 1/4	2.441	1.5	0.748	0.626	0.874	0.236	0.189	16.7	9.6	0.7
UC207TRL	35	-	72	43	20	17.5	25.4	6.5	5.4	21.5	12.8	0.47
UC207-20TRL	-	1 1/4	2.835	1.589	0.787	0.689	1	0.256	0.213	22	13.1	1.03
UC207-22TRL	-	1 3/8	2.835	1.589	0.787	0.689	1	0.256	0.213	22	13.1	1.03
UC207-23TRL	-	1 4/9	2.835	1.589	0.787	0.689	1	0.256	0.213	22	13.1	1.03
UC208TRL	40	-	80	49	21	19	30.2	8	5.9	27.4	16.6	0.64
UC208-24TRL	-	1 1/2	3.15	1.937	0.827	0.748	1.189	0.315	0.232	28	17	1.41
UC209TRL	45	-	85	49	22	19	30.2	8	6.1	27.5	17.1	0.68
UC209-28TRL	-	1 3/4	3.346	1.937	0.866	0.748	1.189	0.315	0.24	28.1	17.5	1.5
UC210TRL	50	-	90	52	24	19	32.6	9	6.5	29.4	19.4	0.81
UC210-30TRL	-	1 7/8	3.543	2.032	0.945	0.748	1.284	0.354	0.256	30.1	19.9	1.78
UC211TRL	55	-	100	56	25	22.2	33.4	9	7.1	36.4	24.5	1.12
UC211-32TRL	-	2	3.937	2.189	0.984	0.874	1.315	0.354	0.28	37.2	25.1	2.47
UC212TRL	60	-	110	65.1	27	25.4	39.7	10.5	7.6	41	28.3	1.53
UC213TRL	65	-	120	65.1	28	25.4	39.7	12	8.5	49.2	34.4	1.86
UC213-40TRL	-	2 1/2	4.724	2.563	1.102	1	1.563	0.472	0.335	49.2	34.4	4.1
UC214TRL	70	-	125	74.6	30	30.2	44.4	12	8.9	53.5	37.8	2.05