


UK300 Series (Heavy Duty)

WIR both side - Tapered Bore

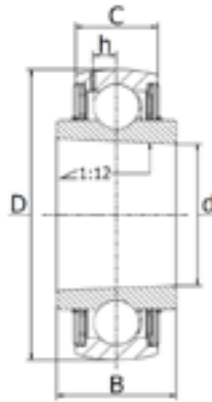

Bearing No	Shaft Dia d ₁		Dimensions (inch/mm)								Load Ratings (kg)		Weight (kg)
	(mm)	(in)	D	L	d	Bi	Be	T	y	w	Dynamic	Static	
UK 305+HE2305	-	3/4	62	35	25	26	22	6.3	8	38	1670	1090	0.48
UK 305+H 2305	20	-											0.48
UK 306+H 2306	25	-	72	38	30	29	24	6.9	8	45	2100	1420	0.59
UK 306+HE2306	-	1											0.59
UK 307+HS2307	-	1 1/8	80	43	35	31	26	7.6	9	52	2620	1820	0.76
UK 307+H 2307	30	-											0.74
UK 308+HE2308	-	1 1/4	90	46	40	34	28	8.4	10	58	3200	2270	1.07
UK 308+HS2308	-	1 3/5											1.01
UK 308+H 2308	35	-											1.01
UK 309+HE2309	-	1 1/2	100	50	45	37	30	9	11	65	4050	3050	1.36
UK 309+H 2309	40	-											1.31
UK 309+HS2309	-	1 5/8											1.29
UK 310+HE2310	-	1 3/4	110	55	50	40	32	10	12	70	4850	3650	1.7
UK 310+H 2310	45	-											1.68
UK 311+HS2311	-	1 7/8	120	59	55	43	34	10.7	12	75	5600	4250	2.14
UK 311+H 2311	50	-											2.06
UK 311+HE 2311	-	2											2.03
UK 312+HS2312	-	2 1/8	130	62	60	46	36	11.5	13	80	6400	4900	2.58
UK 312+H 2312	55	-											2.53
UK 313+HE2313	-	2 1/4	140	65	65	48	38	12.2	14	85	7250	5650	3.21
UK 313+H 2313	60	-											3.07
UK 313+HS2313	-	2 3/8											3.06
UK 315+HE2315	-	2 1/2	160	73	75	54	42	13.8	15	98	8900	7200	4.82
UK 315+H 2315	65	-											4.74
UK 316+HE2316	70	2 3/4	170	78	80	57	44	14.5	17	10.5	9650	8150	5.63
UK 316+H 2316													5.62
UK 317+H 2317	75	3	180	82	85	60	46	15	18	110	10400	9100	6.56
UK 317+HE2317													6.47
UK 318+HS318	80	3 1/8	190	86	90	63	48	15.9	18	120	11200	10100	7.75
UK 318+H 2318													7.52