




Metric Rigid Couplings (Clamp Type)

Rigid couplings are available in one and two piece clamp designs, with and without keyways in steel or stainless steel. Clamp style rigid couplings wrap around the shaft, providing high torsional holding power without the shaft damage and fretting that occurs when set screw style couplings are used. Two-piece clamp styles also allow for disassembly and maintenance without removal of other machine components and feature opposing hardware for a balanced design.



Part No.		Bore (mm)	A	B	C
One Piece Split	Two Piece Split				
MCLX-3-3*	MSPX-3-3	3.0	15.0	22.0	15.0
MCLX-4-4	MSPX-4-4	4.0	15.0	22.0	15.0
MCLX-5-5	MSPX-5-5	5.0	15.0	22.0	15.0
MCLX-6-6	MSPX-6-6	6.0	18.0	30.0	21.5
MCLX-8-8	MSPX-8-8	8.0	24.0	35.0	27.1
MCLX-10-10	MSPX-10-10	10.0	29.0	45.0	33.0
MCLX-12-12	MSPX-12-12	12.0	29.0	45.0	33.0
MCLX-14-14	MSPX-14-14	14.0	34.0	50.0	39.4
MCLX-15-15	MSPX-15-15	15.0	34.0	50.0	39.4
MCLX-16-16	MSPX-16-16	16.0	34.0	50.0	39.4
MCLX-20-20	MSPX-20-20	20.0	42.0	65.0	48.9
MCLX-25-25	MSPX-25-25	25.0	45.0	75.0	51.5
MCLX-30-30	MSPX-30-30	30.0	53.0	83.0	58.7
MCLX-35-35	MSPX-35-35	35.0	67.0	95.0	74.7
MCLX-40-40	MSPX-40-40	40.0	77.0	108.0	84.0
MCLX-50-50	MSPX-50-50	50.0	85.0	124.0	94.2

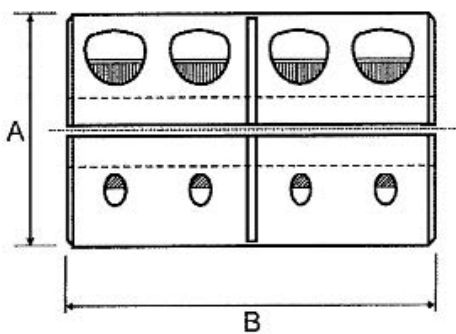

Imperial Rigid Couplings (Clamp Type)



Part No.		Bore (inches)	A	B	C
One Piece Split	Two Piece Split				
CLX-4-4	SPX-4-4	6.4 (1/4")	15.9	25.4	20.7
CLX-6-6	SPX-6-6	9.5 (3/8")	22.2	34.9	26.2
CLX-8-8	SPX-8-8	12.7 (1/2")	28.6	44.5	33.7
CLX-10-10	SPX-10-10	15.9 (5/8")	33.3	50.8	38.5
CLX-12-12	SPX-12-12	19.1 (3/4")	38.1	57.2	46.8
CLX-14-14	SPX-14-14	22.2 (7/8")	41.3	63.5	49.1
CLX-16-16	SPX-16-16	25.4 (1")	44.5	76.2	52.0
CLX-18-18	SPX-18-18	28.6 (1 1/8")	47.6	79.4	55.4
CLX-20-20	SPX-20-20	31.8 (1 1/4")	52.4	82.6	58.1
CLX-22-22	SPX-22-22	34.9 (1 3/8")	63.5	92.1	70.4
CLX-24-24	SPX-24-24	38.1 (1 1/2")	66.7	98.4	73.3
CLX-28-28	SPX-28-28	44.5 (1 3/4")	79.4	114.3	85.5
CLX-32-32	SPX-32-32	50.8 (2")	85.7	123.8	94.4

