


Nickel-Plated Double Pitch Chains

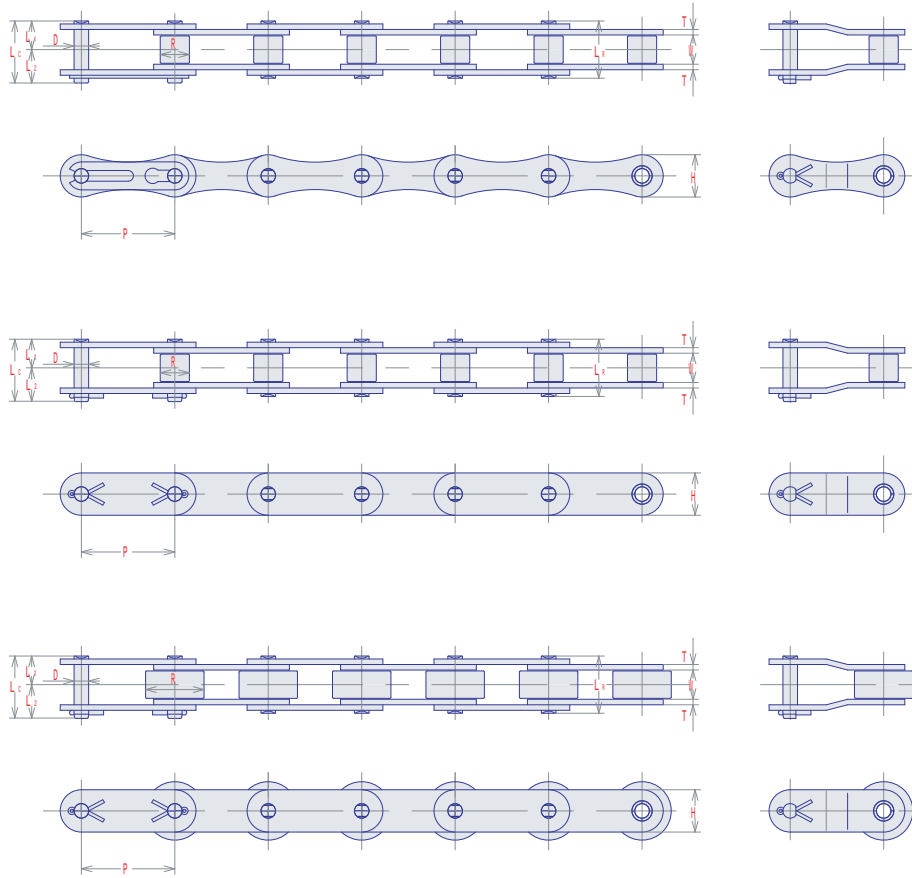

NP DOUBLE PITCH

SY Chain No.	Dimensions - mm										Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Pin				Plate					
		Width	Dia.	Dia.	Length			Height	Thick.				
		P	W	R	D	LR	LC	L1	L2	H			
A2040-NP	25.40	7.95	7.92	3.96	16.4	18.5	8.2	10.3	11.4	1.5	16.9	2.65	0.43
A2050-NP	31.75	9.53	10.16	5.08	20.3	22.0	10.2	11.8	15.0	2.0	27.5	4.31	0.73
A2060-NP	38.10	12.70	11.91	5.95	25.4	27.5	12.7	14.8	17.0	2.4	40.2	6.23	1.03
A2080-NP	50.80	15.88	15.88	7.93	32.4	35.5	16.4	19.1	22.6	3.2	68.6	10.7	1.71
C2040-NP	25.40	7.95	7.92	3.96	16.4	18.5	8.2	10.3	11.4	1.5	16.9	2.65	0.48
C2050-NP	31.75	9.53	10.16	5.08	20.3	22.0	10.2	11.8	15.0	2.0	27.5	4.31	0.82
C2060H-NP	38.10	12.70	11.91	5.95	28.7	31.0	14.4	16.6	17.0	3.2	40.2	8.29	1.38
C2080H-NP	50.80	15.88	15.88	7.93	35.5	38.8	17.8	21.0	22.6	4.0	68.6	15.2	2.32
C2100H-NP	63.50	19.05	19.05	9.53	42.2	45.7	21.1	24.6	28.6	4.8	107.9	23.0	3.46
C2042-NP	25.40	7.95	15.88	3.96	16.4	18.5	8.2	10.3	11.4	1.5	16.9	2.65	0.82
C2052-NP	31.75	9.53	19.05	5.08	20.3	22.0	10.2	11.8	15.9	2.0	27.5	4.31	1.26
C2062H-NP	38.10	12.70	22.23	5.95	28.7	31.0	14.4	16.6	17.0	3.2	40.2	8.29	2.08
C2082H-NP	50.80	15.88	28.58	7.93	35.5	38.8	17.8	21.0	22.6	4.0	68.6	15.2	3.36
C2102H-NP	63.50	19.05	39.67	9.53	42.2	45.7	21.1	24.6	28.6	4.8	107.9	23.0	5.64