





Double Pitch Chain

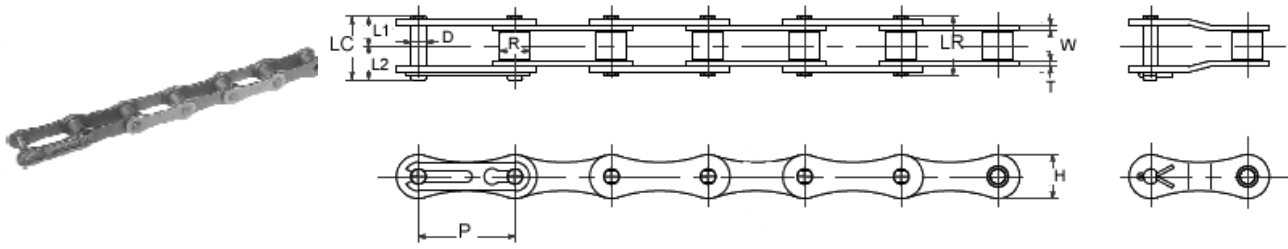

Drive Series

Chain	Pitch (P)	Roller		Pin				Plate		Avg. Ultimate Strength	Max. Allowable Load	App. Kg/ft	
		Width (W)	Dia. (R)	Dia. (D)	LR	LC	L1	L2	Height (H)				Thickness (T)
A2040	25.4	7.95	7.92	3.96	16.5	17.9	8.3	9.6	11.4	1.5	16.7	2.65	0.13
A2050	31.75	9.53	10.16	5.08	20.4	22	10.2	11.8	15	2	27.5	4.31	0.22
A2060	38.1	12.7	11.91	5.95	25.5	26.9	12.8	14.1	17	2.4	40.2	6.23	0.31

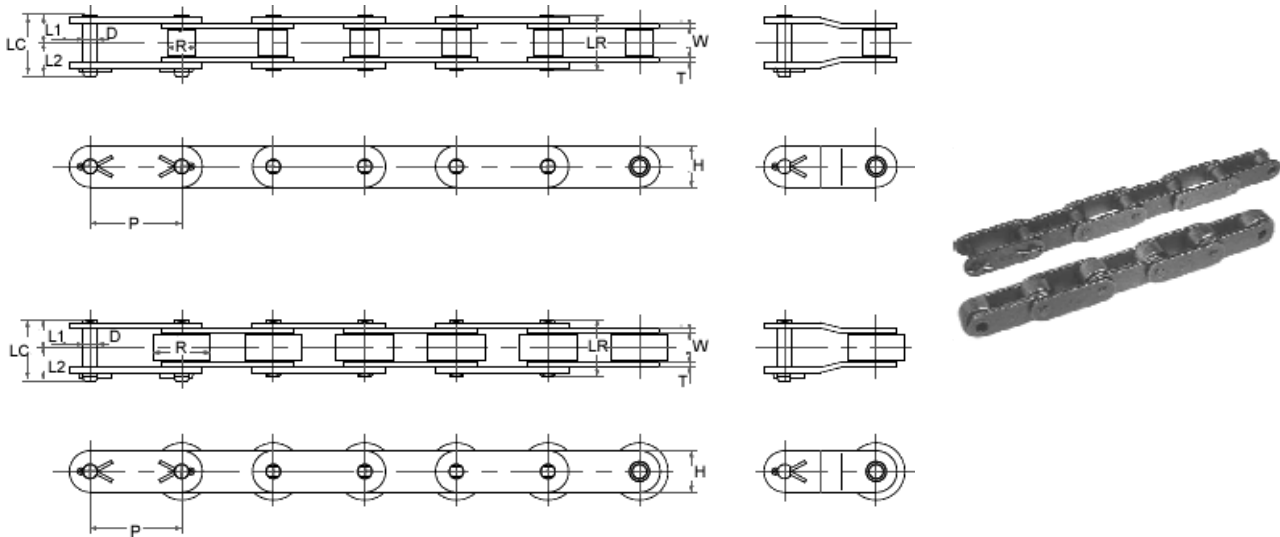

Conveyor Series

Chain	Pitch (P)	Roller		Pin				Plate		Avg. Ultimate Strength	Max. Allowable Load	App. Kg/ft	
		Width (W)	Dia. (R)	Dia. (D)	LR	LC	L1	L2	Height (H)				Thickness (T)
C2040	25.4	7.95	7.92	3.96	16.5	18.5	8.2	10.3	11.4	1.5	16.9	3.63	0.15
C2042			15.88										0.25
C2050	31.75	9.53	10.16	5.08	20.4	22.0	10.2	11.8	15.0	2.0	27.5	6.28	0.25
C2052			19.05										0.38
C2060H	38.1	12.7	11.91	5.95	28.7	31	14.4	16.6	17	3.2	40.2	8.63	0.42
C2062H			22.23										0.63
C2080H	50.8	15.88	15.88	7.93	35.5	38.8	17.8	21	22.6	4	68.6	14.7	2.32
C2082H			28.58										1.02
C2100H	63.5	19.05	19.05	9.53	42.2	45.7	21.1	24.6	28.6	4.8	107.9	22.6	1.05
C2102H			39.67										1.72
C2120H	76.2	25.4	22.23	11.1	52.6	57	26.3	30.7	34.9	5.6	151	30.4	1.5
C2122H			44.45										2.4

