


BS Roller Chain







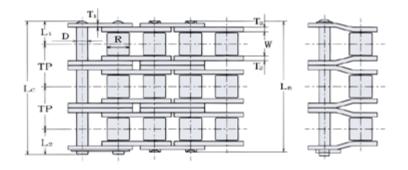



| SY Chain No. (BS) | Dimensions - mm | | | | | | | | | | | | | | Maximum | Average Chain |
|----------------------|-----------------|------|------|------|------|------|------|-----|--------|--------|---|-------|--------|---------------------------------|-----------|------------------|
| | Pitch | | | | | | | | | | | | Trans. | Average Ultimate Strength | Allowable | Chain Weight |
| | Pitti | | Dia. | | | | ngth | | Height | Thick. | | | Pitch | | | |
| | | | | | | | | | | | | | | | | kg/m |
| 0 8 B* | | | | | 16.7 | 18.2 | | | | | - | | 17.8 | 3.14 | 0.61 | 0.41 |
| 08B-2 | 12.7 | 7.75 | 8.51 | 4.45 | 30.6 | 31.9 | 8.4 | 9.8 | 11.8 | 1.5 | - | 13.92 | 31.1 | 5.35 | 1.26 | 0.78 |
| 08B-3 | | | | | 44.5 | 45.8 | | | | | - | | 44.5 | 7.85 | 1.88 | 1.18 |

* Also stocked in 100ft and 50ft reels.

10B

| SY Chain No. (BS) | | | Average | Maximum | Average Chain | | | | | | | | | | | |
|----------------------|--------|-----------------------|---------|---------|------------------|------|------|------|------------------------|------|--------|-------|--------|----------------------|-------------------|--------|
| | Pitch | Bushing Width Dia. | | Dia | | Pin | ngth | | Plate Height Thick. | | | | Trans. | Ultimate Strength | Allowable Load | Weight |
| | | | Did. | Dia | | Lei | | | Height | | THICK. | | | | | |
| | | | | D | LR | LC | L1 | L2 | | T1 | T2 | Т3 | ТР | | kN | kg/m |
| 1 0 B* | | 9.65 | 10.16 | 5.08 | 19 | 20.7 | 9.5 | 11.2 | 14.7 | | - | 16.59 | 22.2 | 4.9 | 0.89 | 0.41 |
| 10B-2 | 15.875 | | | | 35.6 | 37.3 | | | | 1.65 | - | | 44.5 | 8.33 | 1.79 | 0.78 |
| 1 0 B-3 | | | | | 52.4 | 54.4 | | | | | - | | 66.7 | 12.2 | 2.66 | 1.18 |

* Also stocked in 100ft and 50ft reels.